
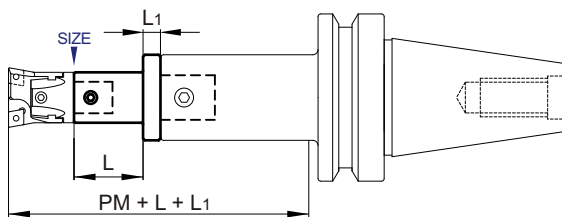


# ACCESSORIES

## REDUCERS

SIZE	Dimension						Product Number	Kg.	Coupling Screw
	øD	øD1	øD2	øD3	L	L1			
22	27	15	22	12	26	10	R 027 022 036	0.130	TC 022
	32	20	22	12	30	10	R 032 022 040	0.180	TC 022
	42	24	22	12	48	10	R 042 022 058	0.320	TC 022
	54	28	22	12	76	10	R 054 022 086	0.510	TC 022
	68	36	22	12	90	12	R 068 022 102	0.900	TC 022
27	32	20	27	15	24	10	R 032 027 034	0.190	TC 027
	42	24	27	15	40	10	R 042 027 050	0.340	TC 027
	54	28	27	15	70	10	R 054 027 080	0.640	TC 027
	68	36	27	15	83	12	R 068 027 095	0.980	TC 027
32	42	24	32	20	36	10	R 042 032 046	0.360	TC 032
	54	28	32	20	66	10	R 054 032 076	0.700	TC 032
	68	36	32	20	78	12	R 068 032 090	1.090	TC 032
42	54	28	42	24	60	10	R 054 042 070	0.880	TC 042
	68	36	42	24	70	12	R 068 042 082	1.310	TC 042
	85	50	42	24	83	12	R 085 042 095	2.080	TC 042
54	68	36	54	28	60	12	R 068 054 072	1.520	TC 054
	85	50	54	28	78	12	R 085 054 090	2.460	TC 054
68	85	50	68	36	88	12	R 085 068 100	3.320	TC 068
85	100	60	85	50	88	12	R 100 085 100	5.040	TC 068

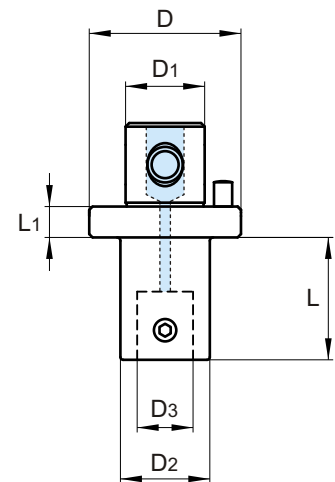

## 45° CHAMFERING HEADS

SIZE	Dimension			Product Number	Insert	Torx Screw	Kg.	Torx Key / Locking Key	
	øD	øD1	L					Torx Key	Locking Key
22	22	43	24	CH 022	DC□□ 11T3□□	TT 409	0.140	TK 15	HK 040
27	27	48	24	CH 027	DC□□ 11T3□□	TT 409	0.160	TK 15	HK 040
32	32	62	30	CH 032	DC□□ 11T3□□	TT 409	0.300	TK 15	HK 050
42	42	72	30	CH 042	DC□□ 11T3□□	TT 409	0.400	TK 15	HK 050
54	54	94	40	CH 054	DC□□ 1504□□	TT 402	0.910	TK 20	HK 060
68	68	110	40	CH 068	DC□□ 1504□□	TT 402	1.230	TK 20	HK 080
85	85	145	55	CH 085	DC□□ 1504□□	TT 402	2.700	TK 20	HK 100
100	100	170	60	CH 100	DC□□ 1504□□	TT 402	4.140	TK 20	HK 140
200	100	200	60	CH 200	DC□□ 1504□□	TT 402	5.800	TK 20	HK 140

